
Moovi

- → Range of barriers for semi-intensive use, able to manage clear drive throughs up to 6 m. The wide range of accessories available makes them ideal in any context
- → Also available in the Moovi 30S rapid version with opening speed of 1.5 s (plus slow) and intensive use.
- → Control unit with programming display and incorporated two-channel radio receiver (models Moovi 30/60RMM/30S)

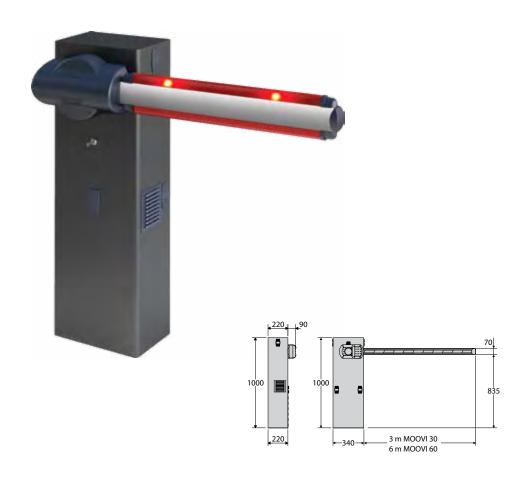

TECHNICAL CHARACTERISTICS

	MOOVI 30S	MOOVI 30	MOOVI 30 RMM	MOOVI 60	MOOVI 60 RMM			
Useful passage	3m	3m	3m	6m	6m			
Control unit	Leo MV D	Alpha Bom	Leo MV D	Alpha Bom	Leo MV D			
Motor power supply			230V					
Opening or closing time	1,5sec + slow down	4sec	4sec	8sec	8sec			
Type of limit switch	electric incorp. and adjustable							
Slowdown	adjustable	-	adjustable	-	adjustable			
Lock			mechanical					
Release	personal release key							
Frequency of use	intensive	semi-intensive	semi-intensive	semi-intensive	semi-intensive			
Ambient conditions			from -20°C to 50°C					
Protection rating	ip24							

Accessories

	Code	Name	Description	MOOVI	біото	MICHEL.	MAXIMA	MAXIMA ULTRA
	P120036 00001	ATM25	Aluminium bar L=2.5 m with drop-shaped profile and red reflectors. Lights and rubber protection not included. Completely protected by new polystyrene packaging.					•
	P120036 00002	АТМЗО	Aluminium bar L=3 m with drop-shaped profile and red reflectors. Lights and rubber protection not included. Completely protected by new polystyrene packaging.				•	•
	P120036 00003	ATM40	Aluminium bar L=4 m with drop-shaped profile and red reflectors. Lights and rubber protection not included. Completely protected by new polystyrene packaging				•	•
	P120036 00004	ATM50	Aluminium bar L=5 m with drop-shaped profile and red reflectors. Lights and rubber protection not included. Completely protected by new polystyrene packaging.				•	•
-1	P120037 00001	ATM30 90°	Articulated bar 90° L=3 fitted. Rubber and lights not included.				•	•
	P120037 00002	ATM50 90°	Articulated bar 90° L=5 fitted. Rubber and lights not included.				•	•
	P120038 00001	ATM30 90° L	3m articulated bar 90° opening, with bar and lights fitted.				•	•
	P120038 00002	ATM50 90° L	5m articulated bar 90° opening, with lights and bar fitted.				•	•
	P120041	ATML60	Aluminium bar L= 60m ø 92 mm. Lights and rubber not included. Completely protected by new polystyrene packaging.				•	•
	P120042	ATML EXT2	Extension L=2m for bar model ATML 60. Lights and rubber not included.				•	•
-3	P120046	OMEGA ATML U 68	Single clamping of hand guard and screws for Maxima_68 Ultra. Bar not included.					•
	P120062	OMEGA ATM U35	Single clamping for ATM bar for MAXIMA ULTRA 35. Bar not included.					•
	P120043	OMEGA ATM	Single clamping of hand guard and screws for bar ATM				•	
	P120044	OMEGA ATML	Single clamping of hand guard and screws for MAXIMA 60/80. Bar not included.				•	
/	P120048	OMEGA ATM FRA	Fracture system clamping for bar ATM				•	
	N728022	AQ6	Complete 6 m rectangular boom for MICHELANGELO			•		
2:	N999606	OMEGA AQ 6	Accessories pack for AQ 6 boom			•		
	N999607 N728026	OMEGA AT 70 AT 704	Accessories pack for AT 704/706 First part of telescopic round boom for					
	N728027	AT 504	MICHELANGELO, diam. 70 mm, length 4.3 m. Second part of telescopic round boom for					
	N728028	AT 502	MICHELANGELO, diam. 50 mm, length 4.6 m. Second part of telescopic round boom for					
	N728030	AT 706	MICHELANGELO, diam. 50 mm, length 2.6 m. Round boom diam. 70 mm length 6.35 m for					
	N728033	AQ3	MICHELANGELO. for openings up to 6 m Complete 3 metre rectangular boom for GIOTTO	•				
	N728034	AQ5	and MOOVI Complete 5 metre rectangular boom for GIOTTO					
2	N999507	OMEGA AQ	and MOOVI Pack of accessories for installation of 3/5 m rectangular boom for MOOVI/GIOTTO	•	•			
	N728031	AT3	Complete 3 metre round boom for MOOVI/ GIOTTO	•				
	N728032	AT5	Complete 5 metre round boom for MOOVI/ GIOTTO	•				
	N728038	AT6	Complete 6 metre round boom for MOOVI/ GIOTTO	•	•			
* Consult the Rft gene	N999513	OMEGA AT	Pack of accessories for installation of 3/6 m round boom for MOOVI/GIOTTO	•	•			

 $[\]ensuremath{^{*}}$ Consult the Bft general catalogue for the complete accessories range