

DEIMOS BT A



Product

• CONTROL UNIT
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK



Range of operators for sliding gates weighing up to 600 Kg.
Maximum leaf speed up to 16 m/min.
Residential use.

DEIMOS BT A | |

Code	Name	Description	
P925222 00002	DEIMOS BT A400	Operator 24 V for sliding gates up to 400 kg in weight. Leaf speed 12 m/min.	
P925222 00003	DEIMOS BT A400 V	Operator 24 V for sliding gates up to 300 kg in weight. Leaf speed 16 m/min.	
P925224 00002	DEIMOS BT A600	Operator 24 V for sliding gates up to 600 kg in weight. Leaf speed 12 m/min.	
P925224 00003	DEIMOS BT A600 V	Operator 24 V for sliding gates up to 360 kg in weight. Leaf speed 16 m/min.	
R925271 00002	DEIMOS BT KIT A600 FRA	Complete kit 24 V for sliding gates weighing up to 600 kg. Leaf speed 12 m/min. Limit switch Electromechanical.	


• Product

• **CONTROL UNIT**
• **TECHNICAL FEATURES**

• ACCESSORIES

• **DISCOVER U-LINK****HAMAL HAMAL Built-In**

- Board power supply: 230V single-phase
- Operator power supply: 24V 80W
- Main features: removable terminal blocks with new standard colour-coding, dip-switch programming and potentiometers, incorporated dual channel receiver, D-Track anti-crushing system, slowdown during opening and closing
- Main functions: automatic re-closing, pedestrian opening, input for 8k2 edge, fast closing

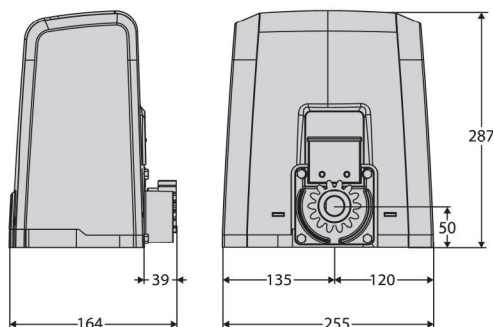












	DEIMOS BT A400	DEIMOS BT A400 V	DEIMOS BT A600	DEIMOS BT A600 V
Control unit	HAMAL SL1		HAMAL SL2	
Power supply	24 V			
Power input	50 W		70 W	
Type of limit switch	electromechanical			
Pinion module	4			
Slowdown	yes			
Locking	mechanical			
Release	lever-operated with personal key			
Frequency of use	intensive			
Environmental conditions	from -20 °C to 55 °C			
Protection rating	IP44			
Actuator weight	7 kg		8 kg	
Impact reaction	d-track			

• Product

• CONTROL UNIT
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK

	Code	Name	Description
	D221073	CP	Plastic rack, 4-module, cross-section 22 x 22 mm, length 1 m, screw-fitted into slots
	N999151	SFD	Base plate for DEIMOS series (supplied with operator) Base plate for DEIMOS series (supplied with operator)
	N190104	BIR C	Rubber safety edge (H 30 mm), price per m
	D111904	MITTO B RCB02 R1	Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A
	D113748 00003	RADIUS B LTA 24 R1	Flashing light with incorporated antenna for motors with power supply 24 V.
	D113749 00003	RADIUS B LTA 24 R2	Flashing light without incorporated antenna for motors with power supply 24 V.
	D113783	IPNOS B LTB 24 R1	Flashing light with LED technology and built-in receiver antenna. New design language with smoke-grey cover. Power supply 24 V ac/dc.
	P123026	B 00 R01	Metal guard for B LTA
	P123025	B 00 R02	Wall mounting for B LTA series flashing beacons
	P121024	Q.BO TOUCH	 Wireless digital touchpad with 433MHz rolling code operation. Manages up to 10 channels and 100 codes.
	P121022	Q.BO KEY WM	 Key selector for outdoor use with double contact. Key selector for outdoor use with double contact.
	P111526	DESME A15	 Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc. Pair of self-aligning photocells. Range 30 m. Power supply 24 V ac/dc.
	P111527	DESME A15 O	 Pair of photocells adjustable 40 ° horizontally and 10 ° vertically. IR signal synchronised to prevent any risk of blinding. Range 30 m. Power supply 24 V ac/dc.
	P903018	PHP	 Pair of aluminium posts for THEA/DESME series photocells Height 522 mm

· Product

· CONTROL UNIT
· TECHNICAL FEATURES

· ACCESSORIES

· DISCOVER U-LINK

What is U-Link?

The innovative technology that gives you new power

An exclusive Bft innovation: U-Link (Universal Link) is an exclusive Bft platform that allows the creation of technological ecosystems. In Home Automation Access, it allows communication with all the home access automation devices of any brand. So you save time and can control everything with ease, without any worries.

It is intuitive

Easy to install and use

It is scalable

Allows an unlimited number of devices to be added

It is flexible

Allows the creation of groups of interconnected products

It is practical

Works with or without a web connection

It is functional

Parameters can be controlled remotely via dedicated applications

• Product

• CONTROL UNIT
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK

All in one scheme: discover this amazing technology

A unique platform **allowing the creation of technological ecosystems** offering a wide range of solutions for different sectors.

Thanks to the B-Eba cards and the Clonix U-Link receiver, this proprietary platform featured by Bft products adapts to any protocol and access automation product (even BFT, non-native U-Link or non-BFT products), and is used in various sectors. Each device thus becomes smart and can be interconnected with other systems, thanks to a language that becomes universal.

U-Base 2



Software to install and easily and comfortably carry out maintenance and identify any malfunction of U-link compatible operators.

U-SDK



U-Sdk is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings.



Magistro

An innovative and easy to install system for easily managing all home automation systems.



U-Control

U-Control is the application that helps the quick and easy integration of BFT automation systems in large building management systems.



Blue-Entry

Technology abreast of the times and attentive to daily needs: thanks to the use of U-link the house gate can now be opened with just your smartphone.



Clonix U-Link

Allows the connection of non-native U-Link products or non-Bft products to U-Link systems.

Bft operators, non-native U-Link products or a product belonging to other brands: can they be connected to U-Link? Yes, thanks to the Clonix receivers. Accessories that know no limits.



B-Eba

A direct line with your operators.

B-Eba expansion cards allow the connection of external devices, such as PCs, smartphones and tablets, to a Bft operator or Clonix receiver, or the connection of several Bft products in a U-Link network. These accessories integrate with U-Link technology and Bluetooth, Z-Wave, TCP/IP protocols, as well as the RS485 serial connection.

A device that fully translates what Bft means for interconnectivity.

BFT SOLUTIONS

BFT U-LINK
BASED PRODUCTSAPPLICATION
SECTORS

Blue-Entry

Magistro

U-Base 2

U-Control

U-Base 2

U-SDK

U-SDK

HOME ACCESS AUTOMATION

BUILDING ACCESS AUTOMATION

URBAN ACCESS AUTOMATION

U-LINK:
INTERCONNECTION
PLATFORMNON-NATIVE
U-LINK
PRODUCTSNON-BFT
PRODUCTS

