



# SERIES R30

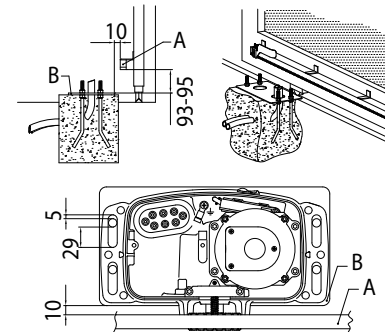

The automations of ROGER TECHNOLOGY for the sliding gates have been designed in different versions. Amazing for its beautiful design and efficient for each size of the different type of gates, The R30 Series cover a range of gates up to 1200 kg of weight.

## DIMENSIONS & INSTALLATION

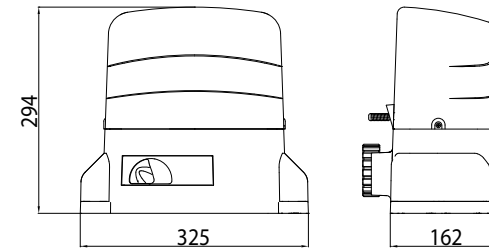

*A = Rack*  
*B = Fastening plate*

Residential

Commercial

**FEATURES**

MODEL	R30/803	R30/804	R30/1203	R30/1204	KIT R30/805
Max gate weight	800 kg	800 kg	1200 kg	1200 kg	800 kg
Power line supply	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz	230V AC - 50Hz
Motor power supply	230V AC	230V AC	230V AC	230V AC	230V AC
Power rating	350W	350W	420W	420W	350W
Frequency of use	50%	50%	50%	50%	50%
Thrust	500N	500N	800N	800N	500N
Operating temperature	-20+55°C	-20+55°C	-20+55°C	-20+55°C	-20+55°C
Protection level	IP43	IP43	IP43	IP43	IP43
Reductor Type	Irreversible	Irreversible	Irreversible	Irreversible	Irreversible
Manoeuvre speed	9.5 m/min (0.16 m/s)	9.5 m/min (0.16 m/s)	9.5 m/min (0.16 m/s)	9.5 m/min (0.16 m/s)	9.5 m/min (0.16 m/s)
Motor thermal protection	150°C	150°C	150°C	150°C	150°C
Incorporated condenser	15 µF	15 µF	18 µF	18 µF	15 µF
Limit switch	Mechanical limit switch	Magnetic	Mechanical limit switch	Magnetic	Mechanical limit switch
Onboard control unit	H70/104AC	H70/104AC	H70/104AC	H70/104AC	H70/104AC
Encoder	Optical	Optical	Optical	Optical	Optical
Type exit gear	Z17/mod 4	Z17/mod 4	Z17/mod 4	Z17/mod 4	Z17/mod 4
Maximum dimension product in mm (L x W x H)	325 x 162 x 295	325 x 162 x 295	325 x 162 x 295	325 x 162 x 295	325 x 162 x 295
Product weight packed (Kg)	15,1	15,3	16,5	16,7	16,7