

Elixo 500 230 V RTS



Motorization for sliding gate

UP TO 8 M | 500 KG




Motor ground fixation


Reliable and hard-wearing for sliding gates

- **Easy to install**
 - Easy access to ground fixation screws from the top.
 - No adjustment needed from the installer.
- **Reliability and durability**
 - Mechanics and electronics based on 30 years of experience.
 - Suitable for residential use and tested for 180,000 openings and closings.
 - Long lifetime with soft stop at the end of travel.
- **Convenient to use**
 - Easy key unlocking from inside.

Standard installation:

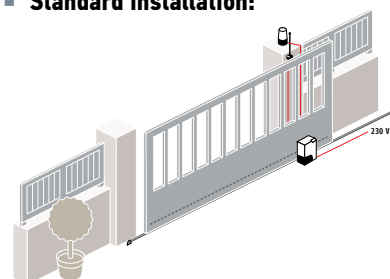

General overall size:

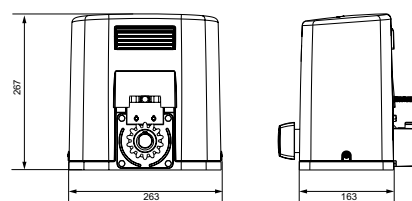

Technical characteristics

	ELIXO 500 KIT STANDARD 230 V
Power supply	220 V / 230 V - 50/60 Hz
Motor power supply	230 V AC
Power consumption	290 W
Capacitor	10 µF (230 V) - 40 µF (110 V)
Motor revolutions	1400 rpm
Maximum consumed current	1.5 A (230 V) - 3A (110 V)
Revolutions at output	48 rpm
Number of storable channels	36
Operating time	0 - 120 s
Gate speed	8.5 m/min
Maximum torque	20 Nm
Number of cycles/day	100

Elixo 500 230 V RTS motor	Keygo RTS	Amber light Master Pro 230 V blinking	Keytis^{NS} 2 RTS	Amber light Eco Pro	Photocells Master Pro Bitech
	Ref. 1841064	Ref. 9015034	Ref. 1841026	Ref. 9018754	Ref. 1841155

Comfort pack					
Ref. 1216368	•	• 2x	•	-	•
Comfort pack ME					
Ref. 1216419	•	-	-	• 2x	•

Accessories



1 m of steel-reinforced nylon rack

Ref. 9011090 (Top fastening)

Ref. 9011089 (Bottom fastening)