



ROAD **BARRIERS**

ROAD BARRIERS

for passages up to 5 m

with unlock device
and foundation plate



Built in flashing light.
EVA.LAMP flashing light
circuit required



Articulated arm in line with
the new design, with
built in rubber profile and
light system



Easy to use external unlock
device



Easily accessible
control panel


EVA.5



- 24 Vdc electromechanical road barrier for intensive use
- Right or left side mounting versions available
- Easy and fast programming of the control panel thanks to its being positioned on the top of the road barrier
- Extremely easy use and programming of the road barrier
 - Possibility of integrated FTC.S photocells thanks to the innovative hide-away system that enables them to be perfectly integrated with the look, ensuring maximum functionality
- Possibility of battery back up system
 - Amperometric anticrushing control



EVA5.A



Elliptical arm of painted aluminium complete with cap and anti-collision rubber profile. (L. 5M) Available in two pieces with joint (EVA5.2A)

VE.TERM




Thermostat for very cold places

VE.AM




Mobile support for bars

VE.RAST



Aluminium rack
L= 2 m. H=60cm

EVA.AF



Painted fixed support

VE.TL




230 Vac Traffic-light

DA.BT6 DA.BT2



DA.BT6: 6Ah 12 VDC Battery
DA.BT2: 2.1Ah 12 VDC Battery
Integrable in the control panel box

CB.24V



Battery charger card

EVA.LAMP





Circuit for EVA.5/EVA.7
Flashing light

DA.2S



Electronic module which allows the synchronized movement of two gates/barrier

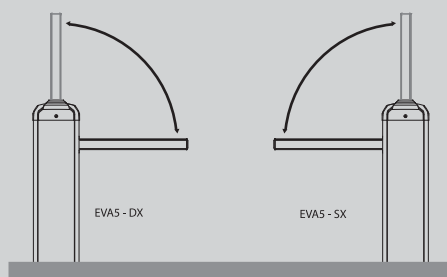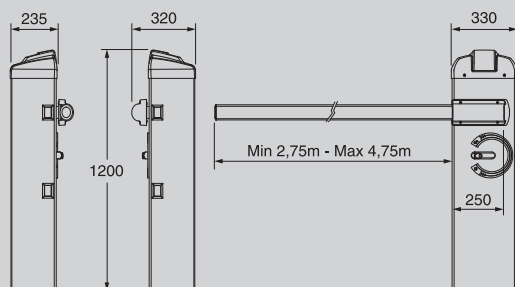

TECHNICAL DATA

EVA.5DX

EVA.5SX

Power supply	230 Vac	230 Vac
Motor supply	24 Vdc	24 Vdc
Absorbed Power	120 W	120 W
Max. Absorbed current	4,5 A	4,5 A
Torque	130 Nm	130 Nm
Opening speed	2,5"	2,5"
Operation cycle	intensive use	intensive use
Protection level	IP 54	IP 54
Operating Temp.	-20°C/+70°C	-20°C/+70°C
Lubrication	grease	grease
Weight	50 Kg	50 Kg

VE.PS




Foundation plate for EVA.5.

EVA5.G




Aluminium joint for EVA5.A

EVA.L



Flashing light set for EVA5.A

VE.KM1H VE.KM2H




Single/two-channel loop detector

VE.CS







Traffic-light control unit

EVA.CAT5




Set of 20 adhesive refractor strips for LADY.A/P / EVA7.A



ACCESSORIES FOR USE

	BAR LENGTH (M)				
	3	3,5	4	4,5	5
EVA5.A	C	C	B	B	A
EVA5.A + VE.RAST	C	B	B	A	A
EVA5.A + VE.AM	C	C	B	B	A
EVA5.A + VE.RAST + VE.AM	C	B	B	A	A
EVA5.A + SC.RES	C	B	B	A	A
EVA5.A + SC.RES + VE.AM	C	B	B	A	A



Key: **EVA5.A**: Shank with rubber and upper profile / **VE.RAST**: Aluminium skirt / **VE.AM**: Mobile support for bar / **SC.RES**: Sensitive resistive edge (complying with annexe 4 of the Machines Directive. Attention: The installation of the VE.RAST interferes with the use of the SC.RES and vice versa. The installation of the EVA.L lights kit does not influence the balancing of the bar