


6 m

ASB-6010 (right-hand installation) ³⁾	7608V001
ASB-6010 (left-hand installation) ³⁾	7611V001

- barrier in steel housing
- 6 m barrier arm, white/red
- integrated radio receiver module (FM 868.8 MHz)
- integrated motor control unit
- max. 350 cycles/day

IP 44

VIDEO



<http://som4.me/vid-p>




6 m

ASB-6010A (right-hand installation) ³⁾	7642V001
ASB-6010A (left-hand installation) ³⁾	7641V001

- barrier in **aluminium housing**
- 6 m barrier arm, white/red
- **integrated warning light**
- integrated radio receiver module (FM 868.8 MHz)
- integrated motor control unit
- max. 350 cycles/day

IP 44

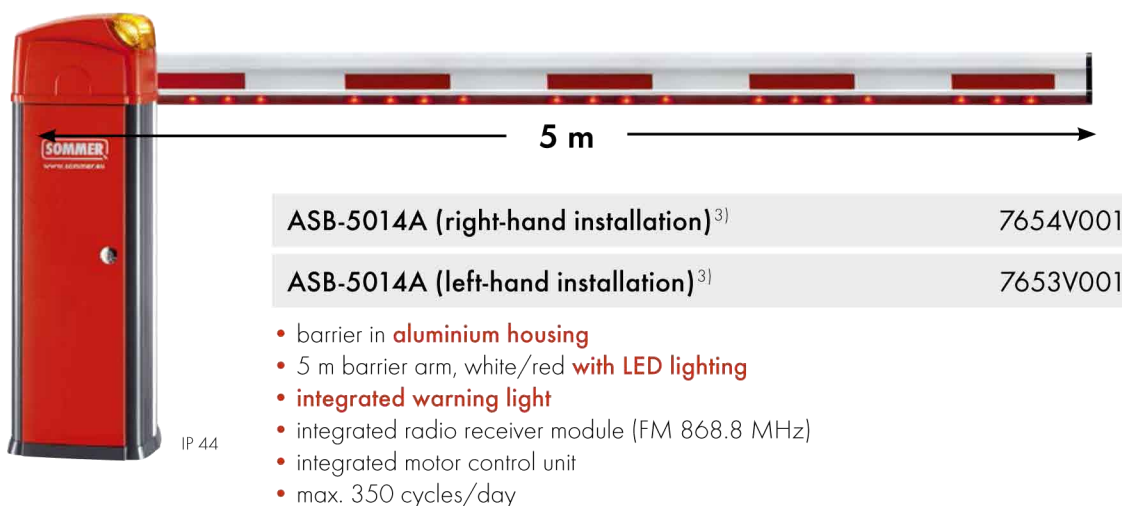

5 m

ASB-5014A (right-hand installation) ³⁾	7654V001
ASB-5014A (left-hand installation) ³⁾	7653V001

- barrier in **aluminium housing**
- 5 m barrier arm, white/red **with LED lighting**
- **integrated warning light**
- integrated radio receiver module (FM 868.8 MHz)
- integrated motor control unit
- max. 350 cycles/day

IP 44

Torque support arm 7615V000

- recommended from a barrier arm length > 3 m
- only for ASB-6010 and ASB-6010A models and a boom length of up to 5 m
- colour: white/red

Support post 7625V000

- recommended from a barrier arm length > 3 m
- colour: white

Note: please only use either torque support arm or support post!

