

# ST-200 Stand-Alone Access Control System

CE RoHS



- Mortise and Water-proof designed.
- 8 sets of door opening passwords which can be set by users.
- Durable stainless steel panel and buttons with indicator lights.
- Capacity for valid cards is 1,000 cards
- Five door opening methods

## Specifications


## Series Model

<b>Power</b>	DC 12V ±15%
<b>Current</b>	Standby:130mA operation:150mA ±5%
<b>Display</b>	X
<b>Casing</b>	Fireproof polycarbonate & Stainless steel
<b>Frequency</b>	125KHz or 13.56MHz
<b>Door Open Modes</b>	1.Password, 2.Proximity card , 3.Proximity card + Password , 4.Password or Proximity card , 5.Special system password .
<b>Door Open Time</b>	00~99(sec.),toggle or trigger state adjustable
<b>Cards</b>	1,000 Cards.
<b>Record</b>	X
<b>Time Zone</b>	X
<b>Interface</b>	X
<b>Sub-reader</b>	X
<b>Input Point</b>	1.Push Boton,2.Security sensor 3.Door sensor
<b>Output Point</b>	1.Door open,2.Alarm output 3.Anti-Tamper output
<b>Operation Mode</b>	Stand-alone
<b>Dimensions</b>	86 (L) x 86 (W) x 30.8 (H) (mm) 115(L)X70(W)X30.8(H)(mm)
<b>Weight</b>	200g

- ST-226: ANSI style, 125KHz, EM format
- ST-228: British style, 125KHz, EM format
- ST-226M: ANSI Panel, 13.56MHz, Mifare format
- ST-228M: British style, 13.56MHz, Mifare format
- ST-226MF: ANSI Panel, 13.56MHz, Mifare SOCA format
- ST-228MF: British style, 13.56MHz, Mifare SOCA format

## Dimensions

Unit:mm

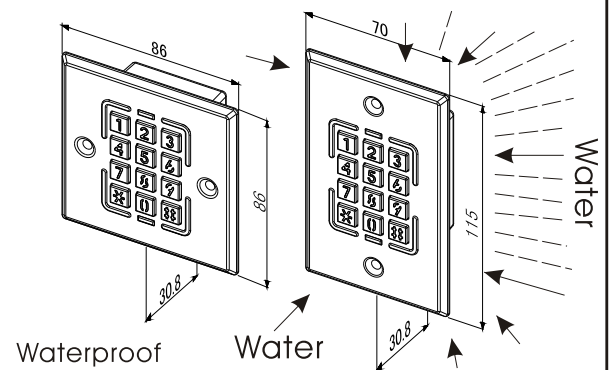

## Structure diagram

