

COMMAX

Overview



VIDEO PHONE SYSTEM

DRC-40CK Color Door Camera

It is designed with Die casting which is not transformed at all and very strong from outside effect and long lasting in function wise.



Features




4 Wire Connection

4 wired type Color Door camera allowing to change with old camera

Surface mounted type

Easy to replace from other brand cameras as its surface mounting type

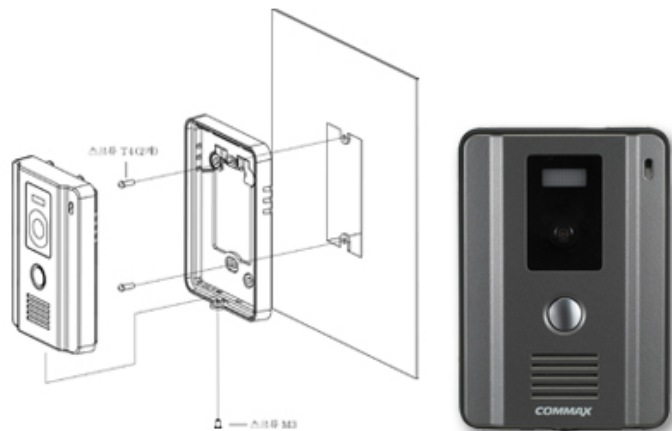



Spec

› Power Source	DC14V
› Mounting type	Wall surface mounted type
› Image sensor	C-MOS
› Wiring	4 wires
› Dimension	Without bracket : 93X135X30mm With bracket : 100X142X31mm
› Distance	50m(0.65Φ), 28m(0.5Φ)
› Temperature	-10(°C)~50(°C)



Function



4 wire Color camera



Wall surface mounted type



C-MOS



Illumination: 0 LUX (White LED "ON")




PAL or NTSC Selectable




Measurements/ Installation diagram/ Wiring diagram, etc.




+ Measurements

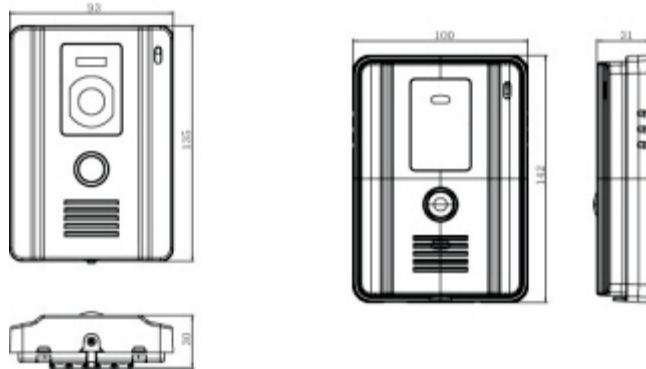

+ Installation diagram

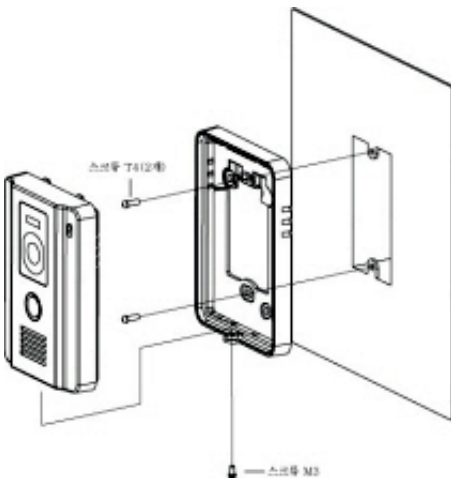

+ Wiring diagram

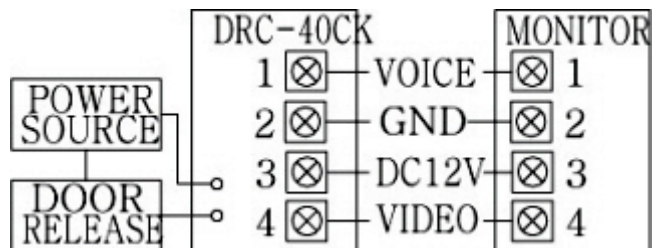

Gallery



Installation example



Entrance



(462-120) 513-11 SANGDAEWON-DONG, JUNGWON-GU, SEONGNAM-SI, GYEONGGI-DO, KOREA
TEL : 82-31 - 731-8791~5 FAX : 82-31 - 731- 8796~7 E-MAIL : ischoi@commax.co.kr

COPYRIGHT (C) 2009 BY COMMAX.COM ALL RIGHTS RESERVED