

Compass


Mechanical turnstiles



The ideal solution for selecting pedestrian transit

- A simple, cost effective solution, for truly effectively managing people flows.
- Available with either clockwise or anticlockwise openings, and also bi-directional.
- Can be coupled with modular barriers to complete installations.

Dimensions (mm)

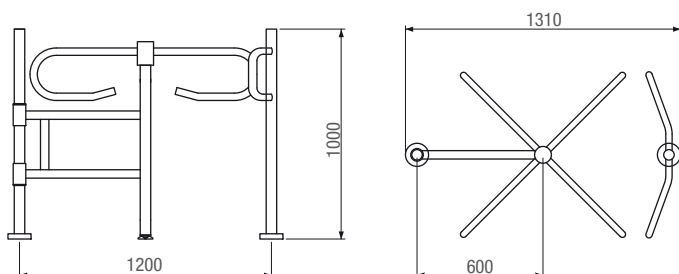

Technical features

Type	PSSPCWO - PSSPCCW - PSSPFMCWO - PSSPFMCCW
Weight (Kg)	18

The complete range



Code	Description
Mechanical turnstiles	
001PSSPCWO	Removable mechanical turnstile with right-hand post for fastening to floors. H = 1,000 mm / 39.37 in.
001PSSPCW	Removable mechanical turnstile with left-hand post for fastening to floors. H = 1,000 mm / 39.37 in.
001PSSPFMCWO	Fixed mechanical turnstile with right-hand post for fastening to walls. H = 1,000 mm / 39.37 in.
001PSSPFMCCW	Fixed mechanical turnstile with left-hand post for fastening to walls. H = 1,000 mm / 39.37 in.
Accessories	
001PSOPG01	Channeler complete with galvanized metal flange riser, plastic flange cover and AISI 304 stainless steel post with arc H = 1,000 mm / 39.37 in.
001PSOPG01X	Channeler complete with AISI 304 stainless steel flange riser, flange cover and post with arc H = 1,000 mm / 39.37 in.

