

Wing


Motorised swing turnstiles




The ideal solution for selecting pedestrian transit in prestigious facilities

- This turnstile stands out thanks to its elegance, quality and silent operation.
- Ideal for installing in prestigious settings such as hotels, showrooms and beauty centers.
- It even comes in the double version (with synchro card) to manage those wider passages.
- Can be coupled with modular barriers to complete installations and perfectly integrates with all Came access control systems.

Dimensions (mm)



Application (mm)

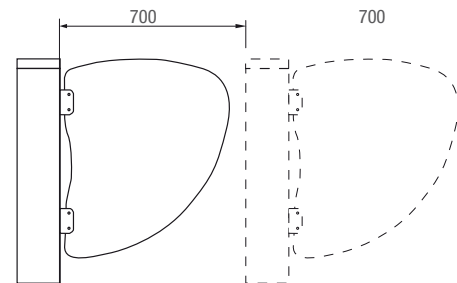

Technical features

Type	PSEPCSS00 - PSEPCSD00 - PSEPCSS00CT - PSEPCSD00CT
Power supply (V)	230 AC
Operating power (V)	24 DC
Current draw (A)	2.5
Weight (Kg)	40
Operating temperature (°C/°F)	-20 ÷ +55/-4 ÷ +131

The complete range



Code	Description
24 V DC motorised swing turnstiles	
001PSEPCSS00	Motorised bi-directional single turnstile complete with control board and push-to-open antipanic system. Plexiglass leaf.
001PSEPCSD00	Motorised bi-directional double turnstile complete with control board and push-to-open antipanic system. Plexiglass leaves.
001PSEPCSS00CT	Motorised bi-directional single turnstile complete with control board and push-to-open antipanic system. Tempered glass leaf.
001PSEPCSD00CT	Motorised bi-directional double turnstile complete with control board and push-to-open antipanic system. Tempered glass leaves.
MANDATORY accessories	
001PSOPAL01	24 V DC 2.5 A switching power unit complete with IP65 casing for one turnstile.
001PSOPAL06	24 V DC 6.5 A switching power unit complete with IP65 casing for two turnstiles.
Accessories	
001PSOPEPCDIS	Plexiglass leaf for the physically challenged. Leaf width: 900 mm / 35.43 in.
001PSOPEPCDISCT	Tempered glass leaf for the physically challenged. Leaf width: 900 mm / 35.43 in.
001PSCSCR04	Console for remotely controlling up to max 4 access-ways.



NOTE
001PSOPAL01 - 001PSOPAL06 IT IS MANDATORY the use of the feeder with the turnstiles.